

## EQUFLOW

# PFAD Disposable PFA Turbine Flow Sensor

*PFA wetted parts, F.S. ranges of 2 & 20 lpm, Frequency Output*

### DESCRIPTION

The PFAD flow sensor has been developed to perform a fast exchange of the flowtube to accommodate hygienic applications in the pharmaceutical industry and other applications where a field replaceable sensor is desirable. It is suitable for clear, opaque, neutral, corrosive and aggressive liquids.

A field replaceable ultra light-weight turbine assembly follows the fluctuation of flow very accurately and generates a high resolution IR reflected digital output signal. Two housing styles, "clip" and "click" types are offered.

Aggressive media can be accommodated as the only wetted materials are PFA and a ruby bearing.

K-factors (pulses per liter) are factory determined and provided for each flow tube. Customer specified K-factors can be accommodated and are programmed at the factory.

External optional electronic packages include model PD6300 flow rate indicator and totalizer and PD6310 batch controllers. Rich in features, these products provide complete solutions for monitoring and batching applications.

#### Features

- Turbine flowsensor with high resolution output
- Flow measuring by revolutionary IR turbine reflection.
- PFA for high chemical and corrosion resistance
- High accuracy and repeatability
- Suitable for opaque liquids
- PFA meets all the requirements of the US Pharmacopeia Class VI
- Programmable K-factor (at factory)
- All wetted parts are made of PFA with ruby bearing




### SPECIFICATIONS

Patent No. US5388466



#### GENERAL

Model	PFAD0045	PFAD0085
Inner diameter in mm	4.5	8.5
Flow range	0.1 - 2 L/min	0.5 - 20 L/min
Accuracy	1% of reading	1% of reading
Repeatability	< 0.15 %	< 0.15 %
Wetted parts	PFA / Ruby	PFA / Ruby
Tube connection thread/hosebarb	1/8 " NPT / 7 mm	1/4 " NPT/ 12 mm
Tube length in mm	52	60
Liquid temperature in °C	-20 to +80	-20 to +80
Max. pressure at 20° C in bar (psi)	20 (284)	15 (213)
Viscosity in cSt.	0.8 - 10	0.8 - 10
K factor (water) in pulse/Liter (nominal)	110,000	6,100
Power supply	5 - 30 Vdc	5 - 30 Vdc
Output signal	5 - 30 V sq. wave	5 - 30 V sq. wave
Power consumption	34 mA at 5 V	34 mA at 5 V
Electrical lead	PVC 1 meter	PVC 1 meter
Recommended Line filter	100 µm	100 µm

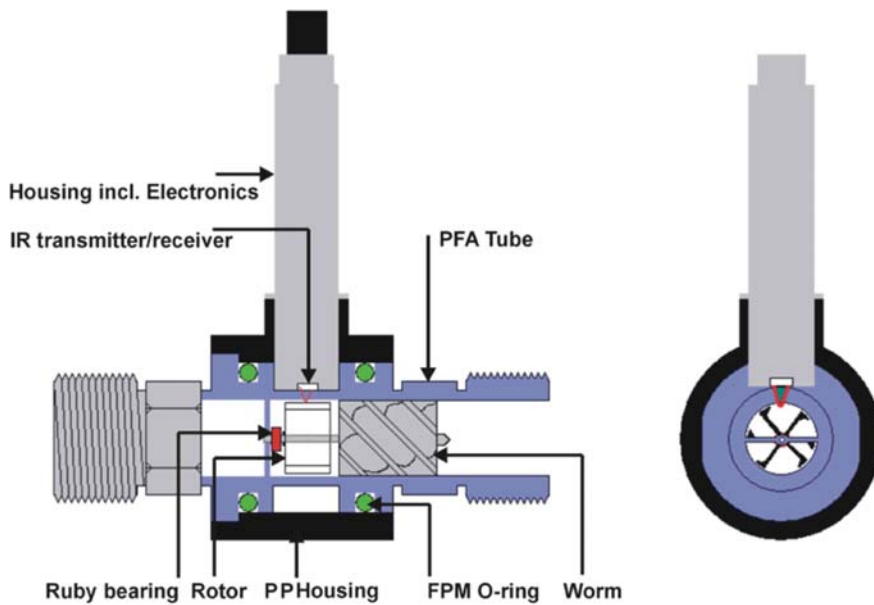

**Working Principal:**  
 A static worm forces the passing fluid to spin. The spinning fluid drives a rotor with reflectors into a frictionless rotation. A high resolution infrared sensor determines the rate of flow by counting the passing reflections. The set up even allows the flow of opaque liquids to be determined accurately. The ultra low mass of the rotor guarantees a quick response to changes in the rate of flow

**Wiring:**  
**Power Supply 5-30 Vdc**  
**Output All Sensors: NPN square wave**

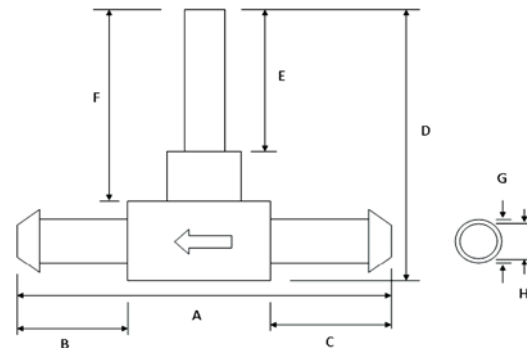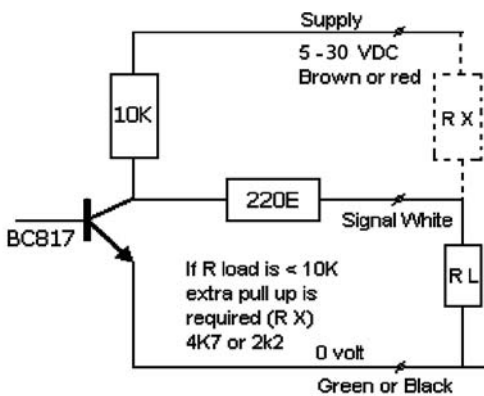

Dim. (MM)	0045- Barb	0085- Barb
A	52	62
B	15	20
C	17	20
D	60	67
E	36	36
F	46	46
G	7.0	12
H	4.5	9.0

## ORDERING INFORMATION

**ABCDEFGH**  
**PFAD0045TNP01DA**

A Model	B Tube Dia./Range	C Wetted Material	D Connection	E Cable Type	F Cable Length	G Version	H Power
PFAD	0045= 4.5 mm/0.1-2 l/min 0085= 8.5 mm/1.0-20 l/min	T=PFA & Ruby	H= Hose Barb N= NPT	P= PVC	01= 1 meter (Standard) 02= 2 meters	D= Click Housing C= Clip Housing	A= 5-30 VDC
<b>Replacement Flow Tubes (DX-Click, CX-Clip Housing)</b>				<b>Replacement Electronics</b>			
PFAD0045TH000(D,C)X- Replacement flow tube, 4.5 mm tube, 7 mm hose barb				0045.P.X.P.01.DA- Click Housing Replacement Electronics, 4.5 mm tube			
PFAD0045TN000(D,C)X- Replacement flow tube, 4.5 mm tube, 1/8" NPT				0085PXP01DA- Click Housing Replacement Electronics, 8.5 mm tube			
PFAD0085TH000(D,C)X- Replacement flow tube, 8.5 mm tube, 12 mm hose barb				000.P.X.P.01.CA-Clip Housing Replacement Electronics,			
PFAD0085TNH000(D,C)X- Replacement flow tube, 8.5 mm tube, 1/4" NPT							

### Ask About Our Other Equiflow Products.....

- Standard Flow Sensor
- Stainless Flow Sensor
- Electronic packages for use with Flow Meters
  - PD6300 Flow rate indicator and totalizer
  - PD6310 batch controllers

