BOXER

Boxer 3KD Series Dual Diaphragm Pump Gas

Gas Flow Rate to 18 l/m

DESCRIPTION

The 3KD series is an extremely compact, robust, and versatile double headed gas diaphragm pump. High quality connection rod and motor bearings combined with slow speed contribute to maximum operational life and low power consumption. This series additionally offers a unique detachable motor construction allowing contaminated heads to be economically exchanged.

Brushed and versatile brushless motor options are offered in this series.


Like all other pumps in the Boxer range, this series can be customized to specific OEM requirements.

FEATURES

- BLDC versions at same costs as brushed DC
- approx. 1500 rpm with speed control 0 to 5V
- speed feedback signal (1 pulse per revolution) output
- Flow control is available in combination with PWM flow controller
- Detachable motor construction
- single, double, and quad heads available

FLOW CURVE

At max speed (Speed Input at 4.5 V DC / 4000 rpm)

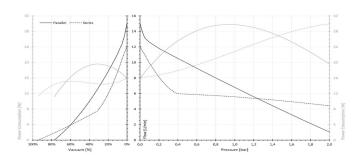





SPECIFICATIONS

GENERAL

Free Flow	18 l/m Brushed, 15 l/m Brushless	
Max Pressure	2.0 Bar (29 PSI)	
Max Vacuum	-800 mbar Brushed, -750 mbar Brushless	
Motor	12 & 24 Volt; DC & BLDC	
Housing Material	PPS (Polyphenylene Sulphide)	
Diaphragm Material	EPDM (other materials available)	
Valve Material	EPDM/Silicone (other materials available)	
Tubing Connection	Suitable for 7.8 mm ID tubing	
Eccentric	2.0 mm (0.8 & 1.0 mm options)	
Max. Ambient Temp	50°C	
Max Media Temp	100°C	
Weight	435 g	

BRUSHED DIMENSIONS







WIRING DETAILS / SPEED CONTROL

Wire	Wire			
1	Red	24 V DC		
2	Black	GND		
3	Green	Speed control input: 0.5 to 4.5 V DC (or 5.0 V PWM with min. 15 kHz signal)		
		Speed range: 445 to 4000 rpm		
		Not recommended to run below 400 rpm (0.45 V)		
		Green wire can be connected to +24 V supply for full speed (4000 rpm) operation		
		Resolution: 10 bit		
4	Yellow	Frequency (rpm) output, 1 pulse (+ 5.0 V) per revolution with 50% on time		

ORDERING INFORMATION

Model	Motor Type	Nominal Motor Voltage (VDC)
3111.650	Brushless	12
3111.660	Brushless	24
3111.129	Brushed	12
3111.252	Brushed	24